

SYSOYEV, N.P.; POTASHOVA, V.P., red.; SYCHEVA, V.A., tekhn. red.

[The fishing industry in the national economic system of
the U.S.S.R.] Rybnaia promyshlennost' v sisteme narodnogo
khoziaistva SSSR. Murmansk, Murmanskoe inzhnoe izd-vo,
1962. 22 p. (MIRA 16:5)

(Fisheries)

POTASKAYEV, A.M.

Cyclic changes in the thyroid gland of minks (*Mustella vison* Eriss).
Dokl. AN SSSR 162 no.5:1201-1204 Je '65. (MIRA 18:7)

1. Voronezhskiy sel'skokhozyaystvennyy institut. Submitted August 31,
1964.

POTASKAYEV, S.V.

Standardization of the basic parameters for bevel and bevel-
cylindrical reduction gears. Proizv.opyt v tiazh.mash. no.3:
56-75 '55. (MLRA 10:2)

(Gearing, Bevel)

POTASKAYEV, S.V.

N/5
662.12
.K81

POTASKAYEV, S. V.

Koverdyayev, N. Elementy zatsepleniya konicheskikh zubchatykh peredach; spravochnyye tablitsy (Elements of contacting bevel gear transmission; reference tables, by) N. S. Koverdyayev i S. V. Potaskayev Moskva, Mashgiz, 1955.

263 p. diagrs., tables.

FOR RELEASE, DIV.

AID P - 4299

Subject : USSR/Engineering

Card 1/1 Pub. 128 - 24/25

Author : Ol'khin, Engineer

Title : Letter to the Editor

Periodical : Vest. mash., #2, p. 87, F 1956

Abstract : The writer of this letter request some information concerning the book of N. S. Koverdyayev and S. V. Potaskayev, Elementy zatsepleniya tsilindricheskikh zubchatykh i chervyachnykh peredach (Elements of gearing of cylindrical toothed and worm gears) Mashgiz, 1953 and is answered by the authors.

Institution : None

Submitted : No date

KOVERDYAYEV, N.S.; POTASKAYEV, S.V.; UMNOV, V.A., inzhener, redaktor;
MODEL', B.I., ~~tekhnicheskii~~ redaktor

[Meshing elements of bevel gear transmission; reference tables]
Elementy zatsepleniia konicheskikh zubchatykh peredach; spravochnye
tablitsy. Moskva, Gos.nauchno-tekhn. izd-vo mashinostroit. lit-ry,
1955. 263 p. (MLRA 9:3)

(Gearing, Bevel)

POTASKAYEV, S. V.

Elementy zatsepleniya tsilindricheskikh zubchatykh i chervyachnykh perodach
(Meshing elements of cylindrical gear and worm drives; reference tables, by
N. S. Koverdyayev (and) S. V. Potaskayev.
Moskva, Mashgiz, 1953.
187 p. Illus., Tables.

30: N/5
662.12
.K8

KOVERDYAYEV, H.S.; POTASKAYEV, S.V.

[Meshing elements of cylindrical gear and worm drives; reference tables]
Elementy zatsepleniia tsilindricheskikh zubchatykh i cherviachnykh pe-
redach; spravochnye tablitsy. Moskva, Gos.nauchno-tekhn.izd-vo mashino-
stroit.lit-ry, 1953. 187 p. (MLRA 6:8)
(Gearing--Tables, calculations, etc.)

60

COMMON ELEMENTS

EC

OPEN

WATERGAS INDEX

ASM-SLA METALLURGICAL LITERATURE CLASSIFICATION

1930-1939

1940-1949

1950-1959

1960-1969

1970-1979

1980-1989

1990-1999

2000-2009

2010-2019

2020-2029

2030-2039

2040-2049

2050-2059

2060-2069

2070-2079

2080-2089

2090-2099

2100-2109

2110-2119

2120-2129

2130-2139

2140-2149

2150-2159

2160-2169

2170-2179

2180-2189

2190-2199

2200-2209

2210-2219

2220-2229

2230-2239

2240-2249

2250-2259

2260-2269

2270-2279

2280-2289

2290-2299

2300-2309

2310-2319

2320-2329

2330-2339

2340-2349

2350-2359

2360-2369

2370-2379

2380-2389

2390-2399

2400-2409

2410-2419

2420-2429

2430-2439

2440-2449

2450-2459

2460-2469

2470-2479

2480-2489

2490-2499

2500-2509

2510-2519

2520-2529

2530-2539

2540-2549

2550-2559

2560-2569

2570-2579

2580-2589

2590-2599

2600-2609

2610-2619

2620-2629

2630-2639

2640-2649

2650-2659

2660-2669

2670-2679

2680-2689

2690-2699

2700-2709

2710-2719

2720-2729

2730-2739

2740-2749

2750-2759

2760-2769

2770-2779

2780-2789

2790-2799

2800-2809

2810-2819

2820-2829

2830-2839

2840-2849

2850-2859

2860-2869

2870-2879

2880-2889

2890-2899

2900-2909

2910-2919

2920-2929

2930-2939

2940-2949

2950-2959

2960-2969

2970-2979

2980-2989

2990-2999

3000-3009

3010-3019

3020-3029

3030-3039

3040-3049

3050-3059

3060-3069

3070-3079

3080-3089

3090-3099

3100-3109

3110-3119

3120-3129

3130-3139

3140-3149

3150-3159

3160-3169

3170-3179

3180-3189

3190-3199

3200-3209

3210-3219

3220-3229

3230-3239

3240-3249

3250-3259

3260-3269

3270-3279

3280-3289

3290-3299

3300-3309

3310-3319

3320-3329

3330-3339

3340-3349

3350-3359

3360-3369

3370-3379

3380-3389

3390-3399

3400-3409

3410-3419

3420-3429

3430-3439

3440-3449

3450-3459

3460-3469

3470-3479

3480-3489

3490-3499

3500-3509

3510-3519

3520-3529

3530-3539

3540-3549

3550-3559

3560-3569

3570-3579

3580-3589

3590-3599

3600-3609

3610-3619

3620-3629

3630-3639

3640-3649

3650-3659

3660-3669

3670-3679

3680-3689

3690-3699

3700-3709

3710-3719

3720-3729

3730-3739

3740-3749

3750-3759

3760-3769

3770-3779

3780-3789

3790-3799

3800-3809

3810-3819

3820-3829

3830-3839

3840-3849

3850-3859

3860-3869

3870-3879

3880-3889

3890-3899

3900-3909

3910-3919

3920-3929

3930-3939

3940-3949

3950-3959

3960-3969

3970-3979

3980-3989

3990-3999

4000-4009

4010-4019

4020-4029

4030-4039

4040-4049

4050-4059

4060-4069

4070-4079

4080-4089

4090-4099

4100-4109

4110-4119

4120-4129

4130-4139

4140-4149

4150-4159

4160-4169

4170-4179

4180-4189

4190-4199

4200-4209

4210-4219

4220-4229

4230-4239

4240-4249

4250-4259

4260-4269

4270-4279

4280-4289

4290-4299

4300-4309

4310-4319

4320-4329

4330-4339

4340-4349

4350-4359

4360-4369

4370-4379

4380-4389

4390-4399

4400-4409

4410-4419

4420-4429

4430-4439

4440-4449

4450-4459

4460-4469

4470-4479

4480-4489

4490-4499

4500-4509

4510-4519

4520-4529

4530-4539

4540-4549

4550-4559

4560-4569

4570-4579

4580-4589

4590-4599

4600-4609

4610-4619

4620-4629

4630-4639

4640-4649

4650-4659

4660-4669

4670-4679

4680-4689

4690-4699

4700-4709

4710-4719

4720-4729

4730-4739

4740-4749

4750-4759

4760-4769

4770-4779

4780-4789

4790-4799

4800-4809

4810-481

B-7-4

Kinetics of oxide film formation on metal surfaces, and their properties. S. G. Melmanishin and K. G. Pustakov (Kolloid. Zhurn., 1941, 7, 3—15).—A cylinder of steel kept at 800° in a current of air and the vapour of stearic palmitic or stearic acid tarnishes almost as rapidly as in absence of such vapours. Electrolytic corrosion of tarnished steel in 5% NaCl is slower after heating in the vapour; the protection of the acids increases in the above order, but is noticeable for a few hr. only.

J. J. B.

MIKHAYLOV, G.P.; POTASKUYEV, K.G.; RAZIKOV, M.I.

Leaching out welding slag. Avtom.svar. 6 no.5:73-76 S-0 '53.
(MLRA 7:11)

1. Ural'skiy politekhnicheskiy institut im. S.M.Kirova.
(Welding)

POTASKUYEV, K. G.

U.S.S.R.

✓ Influence of solid metal carbonates and sulfates on the formation and stability of foam. S. G. Mokrushin, K. A. Manerova, and K. G. Potaskuev. *J. Appl. Chem. U.S.S.R.* 26, 123-6 (1953) (Eng. translation).—See C.A. 48, 3030d. H. L. H.

POTASKUEV, K. G.

Chemical Abstracts

Vol. 48 No. 5

Mar. 10, 1954

Explosive and Explosions

Influence of solid colloidal metal carbonates and sulfates on the formation and stability of foam. ~~By K. A. Manerova, and K. G. Potaskuev. Zhur. Priklad. Khim. 26, 143-7 (1953).~~ The addn. of colloidal CaCO_3 , MgCO_3 , and CaSO_4 as well as solns. of $\text{Al}_2(\text{SO}_4)_3$ and colloidal $\text{Fe}(\text{OH})_3$ was found to stabilize foam (for fire extinguishers). Stability (min.) vs. wt. % of added stabilizer rises, passes through a max., and declines. The rate of foam collapse with MgCO_3 and $\text{Al}_2(\text{SO}_4)_3$ decreases and becomes linear as the wt. % of added powder increases. This is very pronounced with $\text{Al}_2(\text{SO}_4)_3$. I. Bencowitz

114
7-13-54

Потаскуев, К. Г.

AID P - 1587

Subject : USSR/Chemistry

Card 1/1 Pub. 152 - 17/21

Authors : Mokrushin, S. G., Borisikhina, V. I., and Potaskuyev, K. G.

Title : Effect of electrolytes on the formation and stability of foam from malt sprout

Periodical : Zhur. prikl. khim., 28, no.1, 107-108, 1955

Abstract : Solutions of various salts were added to a suspension of malt sprout. Cadmium sulfate, aluminum sulfate, ferric chloride, and zinc chloride increased the volume of foam and its stability. Zinc chloride prevents malt sprout from rotting without affecting its ability to form foam. Malt sprout may be used as a foaming agent for fire extinguishers. Seven ref. (5 Russian: 1936-50)

Institution: Ural Polytechnic Institute

Submitted : Je 30, 1953

KURUKLIS, G.L.; VERESHCHAGINA, M.G.; POTASKUYEV, K.G., kand.
tekhn. nauk, retsenzent; GORDEYEVA, L.P., tekhn. red.

[Electrolytic pickling of steel and cast iron parts in
fused alkali] Elektroliticheskaya ochistka stal'nykh i
chugunnykh detalei v rasplavlennykh shchelochakh. Mo-
skva, Mashgiz, 1963. 83 p. (MIRA 17:3)

S/137/63/000/003/008/016
A006/A101

AUTHORS: Potaskuyev, K. G., Semenova, L. S.

TITLE: The effect of the method of welding 1X18H9T (1Kh18N9T) steel pipes on the resistance of weld joints in 52%-HNO₃

PERIODICAL: Referativnyy zhurnal, Metallurgiya, no. 3, 1963, 11 - 12, abstract 3E66, ("Tr. Vses. n.-i. i konstrukt. in-t khim. mashinostr.", 1960, no. 35, 38 - 42)

TEXT: The authors investigated methods of welding 1Kh18N9T steel pipes for the purpose of obtaining a smooth weld on the internal side of the pipe having a sufficient resistance against corrosion in 52%-HNO₃ at boiling temperature. The pipe welds were carried out with 9A1 (EA1) electrodes with backing rings made of 1Kh18N9T steel or bp.AXMI 10-31,5 (Br. AZhMts 10-31,5) bronze. The results of corrosion tests of the welds in boiling 52%-HNO₃ at atmospheric pressure have shown that welds with welded-up bronze backing rings proved most resistant. Since welds carried out with bronze backing rings proved most corrosion resistant in the pipes, a Cu-base alloy had to be found dissolving at a maximum rate in a

Card 1/2

The effect of the method of...

S/137/63/000/003/008/016
A006/A101

medium that did not affect the 1Kh18N9T steel. For this purpose the following materials were used: brass JDM11 59-1-1 (LZhMts 59-1-1) and JC 59-1 (LS 59-1), bronze 7p. AKM11 10-3-1,5 (Br. AZhMts 10-3-1.5) and Cu M1. The dissolving medium was 30%-HNO₃. Of the alloys investigated LS 59-1 brass dissolves most rapidly, and LZHMts 59-1-1 more slowly. Therefore the backing rings in welding 1Kh18N9T steel pipes should preferably be made of LS 59-1 brass, which after welding can be easily removed by dissolving with 30%-HNO₃, the weld and the pipe being not damaged at this procedure.

V. Tarisova

[Abstracter's note: Complete translation]

Card 2/2

AVEREUKH, Ya.D.; SHARNIN, A.A.; POTASKUYEV, K.G.

Anodic protection of steel in alkali media and the effect of dissolved iron on it. *Izv.vys.ucheb.zav.;khim.i khim.tekh.* 4 no.4: 594-598 '61. (MIRA 15:1)

1. Ural'skiy politekhnicheskii institut imeni kirova, kafedra protsessov i apparatov.
(Steel) (Electrolytic corrosion)

18.8300, 18.8400, 18.3100

65693

86V/136-59-10-10/18

AUTHORS: Averbukh, Ya.D., Potaskuyev, K.G. and Sharnin, A.A.

TITLE: Causes and Means of Reducing the Wear of the Boiler Tubes in the Steam Digester Batteries During Production of Alumina

PERIODICAL: Tsvetnyye metally, 1959, Nr 10, pp 58-64 (USSR)

ABSTRACT: The object of the investigation described in the present paper, carried out jointly by the Department of Chemical Engineering at the Urals Polytechnical Institute, the Bogoslovsky Aluminium Plant (BAP) and the Urals Aluminium Plant (UAP), was to determine the causes and find means of preventing excessive wear of the tubes through which the alkaline aluminate solution is passing through the steam-heated digesters. The importance of the problem is illustrated by the fact that the life of the tubes in the first (on the steam entry side) digester at BAP was only three months, the life of the tubes in the first digesters of the duplex batteries at UAP being approximately eight months. It had been observed that wear of the tubes at BAP was most pronounced at a distance of 1.5 to 1.6 m from the top baseplate; at this point

Card 1/11 the thickness of the tube wall in contact with the

65693

SOV/136-59-10-10/18

**Causes and Means of Reducing the Wear of the Boiler Tubes in the
Steam Digester Batteries During Production of Alumina**

the tube wall, as growth of those formed earlier, which are now distributed uniformly throughout the volume of the liquid (Ref 1). It follows that the intensity of the movement of the liquid layer adjacent to the tube wall should be at its maximum in the boiling zone, since it is there that the vapour bubbles are formed; consequently, wear of the tube is localized in this zone. The tubes used at UAP are also 7 m long; the temperature of the solution (containing 250 to 260 g/l $\text{Na}_2\text{O}_{\text{caustic}}$) entering the tube of the first digester is 105 to 115°C, ie below its boiling point; it is for this reason that boiling of the solution takes place in the middle part of the tube where, also, most intensive wear occurs. The hypothesis formulated above was checked experimentally by studying wear of tube samples subjected to the action of concentrated, industrial, alkaline aluminate solutions under conditions of: (a) absence of boiling, (b) boiling at the solution-tube wall interface and (c) boiling in the volume of the solution. The apparatus shown in Fig 1 was used for this purpose. The solution was contained in an open tank

Card 3/11

65693

SOV/136-59-10-10/18

Causes and Means of Reducing the Wear of the Boiler Tubes in the
Steam Digester Batteries During Production of Alumina

(detail 1) in which three tube specimens were suspended forming a vertical "chain". The middle specimen (detail 2), both ends of which were closed with flanges, could be heated by a nichrome heating element placed in its interior. In this way the middle specimen was subjected to the action of solution boiling at the tube-liquid interface; the bottom specimen was in contact with the solution at a temperature below its melting point, while the top specimen was surrounded by a solution with uniformly distributed vapour bubbles. To prevent the formation of a galvanic cell between the tank and the tube specimens (which would result in anodic passivation of the latter), the tubes were suspended on a cantilever (detail 3) insulated from the tank. To maintain the strengths of the solution constant, distilled water was added to it periodically. To match the conditions obtaining under industrial conditions, the intensity of the bubble formation was varied from experiment to experiment by varying the current through the heating element of the middle specimen. The duration of each

Card 4/11

65693
SOV/136-59-10-10/18

Causes and Means of Reducing the Wear of the Boiler Tubes in the
Steam Digester Batteries During Production of Alumina

experiment was six hours. All specimens were subjected to the same preliminary treatment: polishing, washing in alcohol, drying in a desiccator and weighing; after the test, the loose products of erosion were brushed off, the specimens were washed in water and then in alcohol and, after drying, were weighed again. The rate of wear, $K(g/m^2/hr)$, was calculated from the formula given on p 59 where: Δg - loss of weight; S - specimen surface area, m^2 ; τ - duration of the test, min. The depth of penetration, $\Pi(mm/year)$, was calculated from the second formula on p 59 where: γ - specific gravity of the metal. The results are reproduced in Fig 2 where $\Pi(mm/year)$ is plotted against the rate of the heat flow, $N(kcal/m^2/hr)$, bottom scale), for the top (curve 3), middle (curve 1) and bottom (curve 2) specimens. It will be seen that the depth of penetration was less in the bottom specimen and that in this case, it was practically unaffected by the variation of N . Thus the results of these experiments confirmed the view that localized wear of the tubes is associated with boiling of the solution near the heating surface.

Card 5/11

65693

SOV/136-59-10-10/18

Causes and Means of Reducing the Wear of the Boiler Tubes in the
Steam Digester Batteries During Production of Alumina

However, the question whether this wear is caused by cavitation disintegration, erosion by the solid particles suspended in the solution or corrosion remained still unanswered. The results of experiments in which solutions free from suspended solid particles had been used, proved that erosion plays no part in causing wear of the tubes. The fact that the investigated effect had been observed only in tubes carrying the strong solution (ie in those which pass through the first of the digesters constituting a battery) indicated that cavitation phenomena cannot be regarded as the cause of wear of the tubes either. To prove this point, the previously described experiments were repeated under identical conditions, except that the solution was mechanically agitated but not boiled (ie there was no formation of the vapour bubbles); the solution was agitated by rotating the specimens at a speed varying between zero and the maximum rate of flow of the solution through the pipes under industrial conditions. The results of these experiments are reproduced in Fig 2 (curve 4) where Π_1 (mm/year) is plotted as a function of

Card 6/11

65693

SOV/136-59-10-10/18

Causes and Means of Reducing the Wear of the Boiler Tubes in the
Steam Digester Batteries During Production of Alumina

the peripheral velocity, v , (m/sec, top scale) of the specimens. It will be seen that Π_1 increased with increasing v ; at high values of v , Π_1 attained values similar to those obtained as a result of boiling at the heating surface. This proves that localized wear of the tubes is not caused by cavitation. Consequently, it has to be concluded that the investigated phenomenon is caused by a diffusion material transfer, ie by electrochemical or chemical dissolution of iron in the alkaline aluminate solution. Since the results of experiments, reproduced in Fig 2 in the form of a Π_2 versus v curve (curve Nr 5), in which pure NaOH solution had been used, were similar to those in which an industrial Na_2O caustic-bearing solution had been employed, it was concluded that in this case NaOH is the corroding agent. It is known that corrosion of the iron-carbon alloys in alkaline solutions consists in anodic dissolution of iron; the corrosion products form a protective layer on the metal surface which, however, is soluble in hot, concentrated

Card 7/11

55693

SOV/136-59-10-10/18

Causes and Means of Reducing the Wear of the Boiler Tubes in the
Steam Digester Batteries During Production of Alumina

alkaline solution, the rate of corrosion being determined by the rate of dissolution to this protective layer (Ref 2 and 3), which in turn is affected by the temperature and concentration of the solution and by the degree of agitation. The effect of these factors was investigated in the next series of experiments in which the peripheral velocity of the rotating specimens was constant and maintained at v equal 0.8 m/sec, the results are reproduced in Fig 3 where Π (mm/year) is plotted as a function of the Na_2O caustic content (g/l) of the solution at temperatures ranging from 70 to 140°C. It can be seen that at temperatures up to 110°C the variation of the concentration of Na_2O in the solution had very small effect on Π , which however, increased rapidly with the increasing Na_2O caustic content in the solution at higher temperatures. The same solutions were used in the next series of experiments, each of which was carried at the temperature corresponding to the boiling point of the respective solution (at the atmospheric pressure), the peripheral velocity of the specimens was varied within wide limits.

Card 8/11

65693

SOV/136-59-10 10/18

Causes and Means of Reducing the Wear of the Boiler Tubes in the
Steam Digester Batteries During Production of Alumina

in addition, the effect of agitation (the peripheral velocity of the specimens) was studied also in solutions containing approximately 290 g/l Na_2O caustic at temperatures between 80 and 115°C. The results of all these tests showed that the lower the concentration and temperature of the solution, the less is the effect of the intensity of agitation on the rate of corrosion. Thus, for instance, the rate of corrosion in a solution containing 200 g/l Na_2O caustic, tested at temperatures up to its boiling point (at atmospheric pressure), is practically independent from the intensity of agitation; the effect of agitation, however, becomes apparent at higher temperatures and in more concentrated solutions. The results of all the experiments described above provided a complete explanation of the causes and the mechanism of localized wear of the boiler tubes under consideration. The next problem to be solved was the selection of a tube material which would be more corrosion-resistant and which, in addition, would possess the following characteristics: resistance to inter-granular corrosion (caustic brittleness);

Card 9/11

65693

SOV/136-59-10-10/18

Causes and Means of Reducing the Wear of the Boiler Tubes in the
Steam Digester Batteries During Production of Alumina

availability and low cost; thermal coefficient of expansion and electrode potential as near as possible to those of steel St 20 from which other components of the digesters are made; high thermal conductivity; workability. The code marks and the chemical composition of steels selected for the corrosion tests are tabulated on p 62. Industrial alkaline aluminate solution, containing 290 g/l Na_2O caustic, was used in the experiments carried out at the boiling point (140°C) of the solution which was agitated by rotating the specimens; each test was continued until a constant rate of corrosion of the tested steel was attained; the solution was changed every 24 hr to keep low its iron content which, as had been established, affects the rate of corrosion (the inside of the tube specimens was nickel-plated for the same reason). The results of the corrosion tests are reproduced in Fig 4 where $K(\text{g}/\text{m}^2/\text{hr})$ of various steels (including the plain carbon steel St 10) is plotted against time, τ (hr). In the last series of experiments,

Card 10/11 the effect of temperature on the rate of corrosion of

65693
SOV/136-59-10-10/18

Causes and Means of Reducing the Wear of the Boiler Tubes in the
Steam Digester Batteries During Production of Alumina

various steels was investigated; in all these tests v equal 0.5 m/sec was employed. The results are reproduced in Fig 5 where $K(g/m^2/hr)$ is plotted against temperature ($^{\circ}C$), the duration (hr) of each test being indicated by figures in brackets. All alloy steels were found to be more corrosion-resistant than steel St 10 and while the rate of corrosion of the latter increased with rising temperature, the rate of corrosion of the alloy steels either remained constant or decreased. It was concluded that on economical grounds, steels 10KhSND or 15KhSND are most suitable for replacing steel St 10 as a material for the construction of the boiler tubes under consideration. Acknowledgments are made to T.A.Tkachenko, G.Z.Nasyrov, A.K.Styazhkin, T.Z.Mikhaleyeva, N.V.Yeremeyeva and R.G.Rozenblyum who participated in this work. There are 5 figures, 1 table and 7 Soviet references.

Card 11/11

POTATOSOVA, Ye.G.

Conditions for the germination of the sclerotium in fungi of
the genus Typhula. Zashch.rast.ot vred.i bol. 5 no.7:40 J1
'60. (MIRA 16:1)

(Typhula) (Fungi—Physiology)

POTATOSOVA, Ye.G.

Fungi of the genus Typhula in the U.S.S.R. Bot. zhur. 45 no.4:567-
572 Ap '60. (MIRA 14:5)

(Fungi, Phytopathogenic)

POTATOSOVA, Ye. Q., Cand Agr Sci -- "Critical review of ~~the~~ species of the typnula
family on crop plants ^W the USSR." Len-Pushkin, 1960 (Min of Agr RSFSR.
Len Agr Inst). (KL, 1-61, 202)

-311-

POTATOSOVA, Ye.G.

Typhula infections of winter grain crops. Trudy VIZR no.14:135-142
'60. (MIRA 14:2)

(Rye—Diseases and pests)
(Wheat—Diseases and pests)
(Fungi, Phytopathogenic)

NAKHMANSO, V.M.; OSIDZE, D.F.; SEROV, M.F.; ALEKSANDROVA, V.T.;
SOLOV'YEV, S.; MALYSHEV, N.; IVANENKO, N.M.; POTATURKIN, V.;
CHIZHOV, A.I.; MIKHAYLOV, N.N.

In the Soviet Union. Veterinariia 39 no.1:88-96 Ja '63.
(MIRA 16:6)
(Veterinary medicine)

POWERNIKH, I.Ye., and Ed. G. (Eds.) "Irradiation of the therapy of acute odontogenic osteomyelitis, ~~the~~ ^{the} ~~method~~ ^{method} of ~~the~~ ^{the} early extraction of the causative tooth. (Organization of service to stomatological patients under condition of the ~~regional~~ ^{regional} center)." Semipalatinsk, 1957. 18 pp (Semipalatinsk ^{regional} Oblast ~~hospital~~ ^{hospital}), 250 copies (HI, 22-52, 115)

POTATURKINA, N.Ye., dotsent

Treatment of fractures of the jaws; according to data of the
Semipalatinsk Provincial Hospital. Stomatologiya 43 no.1:
97-98 Ja-F'64 (MIRA 17:4)

1. Kafedra gospiatal'noy khirurgii (zav. - dotsent K.Ch.
Gruzakov) Semipalatinskogo meditsinskogo instituta.

POTATURKINA, N.Ye.

Treatment of acute odontogenic osteomyelitis of the jaws.
Zdrav.Kazakh. 17 no.7:35-40 '57. (MIRA 12:6)

1. Iz stomatologicheskogo otdeleniya Semipalatinskoy oblastnoy
bol'nitsy.

(OSTEOMYELITIS) (JAWS--DISEASES)

POTATURKINA, N. Ye., Cand of Med Sci -- (diss) "Practical experience in the treatment acute single cavity osteomyelitis with the use of early extraction of the diseased tooth (Organization of stomatological aid for patients served by an oblast center)." Semipalatinsk, 1957, 18 pp (Semipalatinskaya Oblast Hospital), 100 copies (KL, 31-57, 105)

LEVITSKIY, E.; POTATUYEV, P.

Ensure efficient bank work under seven-hour workday conditions.
Den. 1 kred. 18 no.9:35-42 S '60. (MIRA 13:8)

1. Glavnyy bukhgalter otdeleniya Gosbanka v g.Korostysheve Zhitomir-
skoy (for Levitskiy). 2. Glavnyy bukhgalter Biyskogo otdeleniya
Gosbanka Altayskogo kraya (for Potatuyev).
(Banks and banking) (Hours of labor)

POTATUYEVA, Yu. A., Cand Agr Sci -- (diss) "Effect of Boron and
Molybdenum upon ~~the~~ ^{the} Seed Crop and Processes of Metabolism in Seed
Vessels of the Sugar Beet." Mos, 1957. 19 pp (All-Union Sci Res
Inst of ^{Fodders} ~~Feedstuffs~~ in V. R. Vil'yams, ~~All Union Acad of Agricultural~~
~~Sci under V. I. Lenin VASKHNIL~~), 110 copies (KL, 47-57, 89)

50

POTAPENKO, V. B.

POTAPENKO, V. B. --"The Problem of Thermal Stability of Acrylic and Metacrylic Acids as Well As of their Ethers and Polymers." *(Dissertation for Degrees in Science and Engineering Defended at USSR Higher Educational Institutions) Ministry of Higher Education USSR, L'vov State University and Ivan Franko, Chair of Organic Chemistry, L'vov 1955

SO: Knishnaya Letenka, No. 25, 18 Jan 56

* For Degree of Candidate in Chemical Sciences

KOVARDYAYEV, N.S.; POTASNAYEV, S.V.

Letter to the editor. Vest.mash. 36 no.2:87 Y '56. (MLRA 9:5)
(Gearing--Tables, calculations, etc.)

ICTATOV I. I.

USSR/Medicine - Societies
Otology

Jul/Aug 49

"Joint Meetings of the Moscow Branch of the All-Union Society of Otorhinolaryngologists and the Moscow Scientific Research Institute of Defectology, Academy of Pedagogical Sciences RSFSR," I. I. Potatsov, 1 p

"Vest Oto-Rino-Laringol" No 4

Two meetings were held 10-11 May 49. B. S. Preobrazhenskiy and Docent R. M. Boskis reported on deafness in children. Docent F. F. Ray and S. A. Zykov, Cand Pedagogical Sci, discussed methods of teaching deaf children. After several more reports, Prof Ya. S. Temkin, Chm, spoke on progress already made, and on the value of joint meetings.

FDD

151T79

POTATUYEV, A.A.; SHELOMOV, I.K.; PARIMSKIY, A.I.

Speeding-up the gas chromatographic analysis of multicomponent mixtures. Zav. lab. 31 no.11:1328 '65. (MIRA 19:1)

1. Volgodonskoy filial Vsesoyuznogo nauchno-issledovatel'skogo i proyektnogo instituta sinteticheskikh zhirozameniteley.

POTAYCHUK, I. M.
KOSHARNYY, I.Ya. [Kosharnyyi, I.IA.]; PIDPRIGORSHCHUK, M.V.; GAPSHENKO, I.I.;
SKRIPNIK, K.I.; KASHCHENYEV, I.A., red.; KUTSENKO, V.P., red.;
NIKOLAYENKO, V.S., red.; POTAYCHUK, I.M. [Potaichuk, I.M.], vidp.
red.; SENDZYUK, F.L., red.; FOGT, V.Ya., tekhn. red.

[Soviet Drohobych Province] Radians'ka Drohobychchyna. Drohobych,
Drohobyts'ke obl. vyd-vo, 1957. 199 p. (MIRA 11:8)
(Drohobych Province)

MUROMTSEV, A.M.; ARKHIPOVA, Ye.G.; MAKEROV, Yu.V.; KHARITONOV,
D.G.; DOBROVOL'SKAYA, L.N.; POTAYCHUK, M.S.; VORONOVA,
S.P.; BELOV, V.P.; RZHEPLINSKIY, G.V., nauchn. red.;
ROSHCHINA, V.V., red.; ZARKH, I.M., tekhn. red.

[Basic characteristics of the hydrology of the Atlantic
Ocean] Osnovnye cherty gidrologii Atlanticheskogo Okeana.
Pod red. A.M.Muromtseva. Moskva, Gidrometeoizdat, 1963.
835 p. ____ [Atlas of vertical cross sections and maps of
temperature, salinity, density and oxygen composition] Pri-
lozhenie no.2. Atlas vertikal'nykh razrezov i kart tempera-
tury, solenosti, plotnosti i sodержaniia kisloroda. 182 p.
(MIRA 17:3)

1. Moscow. Gosudarstvennyy okeanograficheskiy institut.

LEDNEV, V.A.; POTAYCHUK, M.S.

Discharge of Atlantic water through the Faroe-Shetland
Channel. Vop. geog. no.62:66-80 '63. (MIRA 17:3)

POTAYCHUK, M.S.

Calculating the magnitude of heat advection by the North Atlantic
current from data of the International Geophysical Year. Trudy
GOIN 67:86-103 '62. (MIRA 15:7)
(Atlantic Ocean--Ocean currents)
(Atlantic Ocean--Ocean temperature)

POTAYCHUK, S.I.

Submarine as a new means of oceanographic research. *Biul. Oceanogr.*
no.8:73-74 '61. (MIRA 15:1)
(Severianka (Submarine boat)) (Oceanographic research)

ZAYTSEV, G.N.; POTAYCHUK, S.I.

Second cruise of the research ship "Sevastopol" in the Norwegian
Sea under the program of the International Geophysical Year. Biul.
Okean.kom. no.6:50-54 '60. (MIRA 14:7)
(Norwegian Sea—Oceanographic research)

ALEKSEYEV, A.P.; POTAYCHUK, S.I.

First cruise of the research ship "Sevastopol" in the Norwegian Sea
under the program of the Internal Geophysical Year. Biul.Okean.kom.
no.6:45-49 '60. (MIRA 14:7)
(Norwegian Sea—Oceanographic research)

POTAYCHUK, S.I.

Some regularities in the hydrologic regime of the Sea of Azov.
Okeanologiya 3 no.3:441-452 '63. (MIRA 16:8)

1. Vsesoyuznyy nauchno-issledovatel'skiy institut morskogo
rybnogo khozyaystva i okeanografii (VNIRO).
(Azov, Sea of—Hydrology)

TIMOFEYEV, I.A.; POTAYCHUK, S.I.; BOGDANOV, M.A.

Apropos of V.V.Rossov's article "Tidal variability of hydrological
conditions." Okeanologiya 2 no.4:731-734 '62. (MIRA 15:7)
(Oceanography) (Rossov, V.V.)

BOGDANOV, M.A.; YERMACHENKO, I.A.; POTAYCHUK, S.I.; EDEL'MAN, M.S.

Hydrology in the Faeroe-Iceland area. TRUDY VNIRO 46:61-64 '62.
(MIRA 15:10)

(Faeroe Islands region—Oceanography)
(Iceland region—Oceanography) .

POTAYCHUK, S.I.

Some characteristics of the hydrogeologic cyclic change in the
commercial areas of the Norwegian, Greenland, and Barents Seas.
TRUDY VNIRO 46:92-102 '62. (MIRA 15:10)
(Arctic Ocean region—Oceanography)

POTAYCHIK, S.I.

Some regularities of the hydrologic regime of the Caspian Sea.
Trudy VNIRO 57:113-130 1965. (MIRA 16 1)

LADYKIN, V.P.; GRUSHEVSKIY, B.N.; IVANOVA, R.P.; POTAYEVICH, Ye.V.

Environmental conditions and energy metabolism in plants. Trudy
Kar. fil. AN SSSR no. 77:4-23 '64. (MIRA 18:5)

DADYKIN, V.P.; GRYSHEVSKIY, B.N.; POTAYEVICH, Ye.V.

Use of radiation energy by plants under various environmental
conditions. Trudy Inst. biol. UFAN SSSR no. 43:7-16 '65
(MIRA 19:1)

1. Institut biologii Petrozavodskogo universiteta.

POTAYEVICH, Ye.V.

Spectral composition of light under the forest canopy.

Trudy Inst. biol. UFAN SSSR no. 43:195-198 '65
(MIRA 19:1)

1. Institut biologii Patrozavodskogo universiteta.

DADYKIN, V.P.; CHERNOMORSKIY, S.A.; POTAYEVICH, Ye.V.

Correlation between the absorption of radiant energy and the
pigment content in the suspension of Chlorella. Bot. zhur.
49 no.3:398-403 Mr '64. (MIRA 17:3)

1. Karel'skiy filial AN SSSR, Petrozavodsk.

POTAYENKOVA, P.

The power of a trade-union committee lies in its activite group.
Sov.profsoluzy 16 no.16:44-46 Ag '60. (MIRA 11:8)

1. Predsedatel' Krasnoyarskogo krayevogo komiteta profsloyuza
meditsinskikh rabotnikov.
(Krasnoyarsk Territory--Trade unions)

POTCHEV, V.

New developments in the work of the rural tax apparatus. Fin. SSSR
17 no.5:67-70 My '56. (MLRA 9:8)
(Latvia--Agriculture--Taxation)

277

9

***Fractional Detection of Potassium.** H. N. Pechinok (*Zhurnal Prikladnoi Khimii* (*J. Applied Chem.*), 1935, [11], 6, (3), 524-527). [In Russian, with German summary.] A new method of detecting K in the presence of all other cations, except Rb and Cs, is based on $\text{Na}_2\text{Co}(\text{NO}_2)_6$ together with HCHO and alkali (to remove the effect of NH_4OH). Up to 0.6 mg. of K in a dilution of 1:5000 can be detected. M. Z.

ASS. S. A. METALLURGICAL LITERATURE CLASSIFICATION

POCHIN, V. Ya.

"On the Synthesis of Triszenohehals." by V. Ya. Pochinok (n. 1316)

CC: Journal of General Chemistry (Zhurnal Obshchei Khimii; 1946, Volume 16, No. 8

Y. RYKOV, V. Y.

"On the Synthesis of unsaturated Triazines " by V. Y. Rykov. (p. 195,

in: Journal of General Chemistry (Zhurnal Obshchei Khimii) 1959, Volume 10, No. 8

POTEBNIA, A.V.

Specificity of the "precificity" of pressor and depressor
formations in the medulla oblongata. Vest. Mosk.un. Ser. 6:
Biol., pochv. 20 no.5:20-24 S-O '65. (MIRA 18:11)

1. Kafedra fiziologii chelovoka i zhivotnykh Moskovskogo
universiteta. Submitted July 7, 1967.

POTEBNYA, A.V.; UDEL'NOV, M.G.

Changes in the blood circulation in the extremities and intestine following stimulation of the pressor and depressor regions of the medulla oblongata in cats. Nauch.dokl.vys.shkoly; biol.nauki no.4:56-59 '65. (MIRA 18:10)

1. Rekomendovana kafedroy fiziologii zhivotnykh Moskovskogo gosudarstvennogo universiteta im. M.V.Lomonosova.

POTEBNYA, Yu.M., inzh.

Investigating softening temperatures for alloys and fluxed high-grade and lean ore sinters. Izv.vys. ucheb.zav.; chern.met. no.9: 3-14 S '58. (MIRA 11:11)

1. Dnepropetrovskiy metallurgicheskiy institut.
(Sintering) (Pyrometry)

POTEBNYA, Yu. M. Cand Tech Sci -- (diss) "Processes of softening and primary formation of slag during blast furnace smelting on fluxed sinter." Dnepropetrovsk, 1959. 20 pp (Min of Higher and Secondary Specialized Education UkrSSR. Dnepropetrovsk Order of Labor Red Banner Metallurgical Inst im I. V. Stalin), 200 copies (KL, 52-59, 122)

YUPKO, L.D.; VOLIOVIK, G.A.; POTEBNYA, Yu.M.; BOLKUNOV, Ye.P.

Behavior of sulfur in a blast furnace with the complete removal of
raw limestone from the charge mixture at the Southern Mining and Ore
Dressing Combine. Stal' 25 no.7:582-584 J1 '65. (MIRA 18:7)

1. Zavod "Zaporozhstal'" i Dnepropetrovskiy metallurgicheskiy institut.

SOV/133-59-6-2/41

AUTHORS: Potebnya, Yu.M., Engineer and Litvinova, T.I.,
Candidate of Technical Sciences

TITLE: Primary Slag Formation in Blast Furnaces Operating with
Fluxed Sinter (Pervichnye shlakobrazovaniye pri
rabote domennykh pechey na oflyusovannom agglomerate)

PERIODICAL: Stal', 1959, Nr 6, pp 485-494 (USSR)

ABSTRACT: Processes of the formation of primary slags in a
blast furnace of the "Zaporozhstal'" Works operating
on a nearly 100% sinter burden (sinter basicity:
0.9 - 1.0) has been investigated. Samples of slag,
gas and temperature measurements were carried out on
3 levels: I level 8800 mm from the bottom of the throat
(about the middle of the stack); II level 3100 mm from
the bottom of the stack; III level - middle of the
bosh parallel (4700 mm from tuyere level) - Fig 1.
On every level sampling was done to a distance of 2 m
from the wall along the furnace radius every 500 mm.
Cleaning of the sampling holes was done with a
pneumatic ram (Fig 2), sampling tubes were introduced
mechanically into the furnace. During the period of
investigation (January - June 1958) the furnace was

Card 1/6

SOV/133-59-6-2/41

Primary Slag Formation in Blast Furnaces Operating with Fluxed Sinter

producing basic iron of an average composition%: 0.75 Si, 2.20 Mn and 0.045 S. The furnace was operating smoothly at 0.8 atm, top pressure, on a burden containing only 6-7% of crushed ore. Charging was cyclic: 6 charges CCLC/SS/, 2 charges CSSCLC/ and 1 charge CSCL/CS/; occasionally the number of charges in the cycle was varied. Operating indices of the furnace (table 1); limits of variation in the composition of slags taken from the first (nominator) and the second (denominator) levels (table 2); changes in the composition of slags and the distribution of temperatures on the first level (Fig 3); microstructure of slags from the first level (Fig 4); variations in the content of SiO_2 , CaO, FeO in slags and the distribution of temperatures on the bosh level (Fig 5); differences between the top and bottom limits of variation of slags from the bosh (table 3); the composition of some samples of primary slags from the peripheral ring of the second and third level (table 4);

Card 2/6

SOV/133-59-6-2/41

Primary Slag Formation in Blast Furnaces Operating with Fluxed Sinter

microstructure of slags from the bosh (Fig 6); changes in the content of SiO_2 , CaO and FeO in slags and CO_2 in the gas on the second level (Fig 7); microstructure of slags from the second level - Fig 8; microstructure of sinter withdrawn from the first and second levels (Fig 9 and 10 respectively); changes in the composition and basicity of peripheral slags along the height of the furnace (Fig 11); the position of primary slags from the bosh on the ternary diagram (SiO_2 , Al_2O_3 , CaO) - Fig 12. It was found that:

- 1) Variations in the composition of primary slags in the bosh of the furnace operating with fluxed sinter are 2-4 times lower than when operating with a raw ore.
- 2) On operation with sinter of 0.9 basicity the primary slag formation begins in a narrow peripheral ring in the middle of the stack (I level), which becomes wider (up to about 1 m from the wall) at the bottom of the stack (II level): the part of the stack between levels I and II is the actual zone of the formation of primary slags which are unstable in their

Card 3/6

SOV/133-59-6-2/41

Primary Slag Formation in Blast Furnaces Operating with Fluxed Sinter

composition. On increasing the basicity of sinter to 1.0 this zone is shifted down, somewhat below level 1. 3). The peripheral zone of the bosh, about 1 m wide is the zone of stable primary slags in which the process of formation of primary slag is substantially finished. There the composition of slag is very close to that of the final slag. Slags in the bosh at a distance of more than 1 m from the wall are unstable in their composition. 4) As with increased basicity the formation of primary slag is also finished in the bosh, thus with increasing basicity the zone of the formation of slags narrows. This should be advantageous for increasing the rate of driving of the furnaces.

5) The basicity of peripheral slags in the bosh increases insignificantly on increasing the basicity of the sinter to 1.0 but the variation in the slag basicity along the bosh radius noticeably decreases (to 1.05 - 1.18 instead of 0.93 - 1.17 at basicity about 0.9).

Card 4/6

SOV/133-59-6-2/41

Primary Slag Formation in Blast Furnaces Operating with Fluxed Sinter

6) Already during the process of reduction of fluxed sinter in the furnace the formation of the main structural component of the primary slags - wollastonite ($\text{CaO} \cdot \text{SiO}_2$) takes place which considerably facilitates the formation of slag.

7) Olivines have no substantial influence on the process of melting on the periphery of the bottom of the stack and in the bosh as their content in samples of slag and sinter was insignificant. This leads to the formation of primary slags with a low iron content. At a distance from the wall of 1.5 - 2 m (in the range of lower temperature) on the above two levels, olivines were found in samples of sinter in considerable quantities. This is due to the fact that structurally free iron oxides are reduced earlier. Because of the low melting temperature of olivines, the above leads to the formation of ferrous slags or liquid masses with an intermediate structure, decreasing the permeability in the melting zone. Therefore, a decrease in the

Card 5/6

SOV/133-59-6-2/41

Primary Slag Formation in Blast Furnaces Operating with Fluxed Sinter

proportion of olivines in sinters, which can be obtained on increasing their basicity to 1.3 - 1.5 should lead to a decrease in the size of the melting zone and thus to an improvement in the gas permeability in this zone. There are 12 figures, 4 tables and 13 Soviet references.

ASSOCIATION: Dnepropetrovskiy metallurgicheskiy institut
(Dnepropetrovsk Metallurgical Institute)

Card 6/6

WIDOMY, G.I., kand. tekhn. nauk; POTEBNYA, Yu.M., kand. tekhn. nauk

Reducing the sulfur content of converter cast iron at the Zaporozhstal' Plant in connection with an improvement of the technology of blast furnace smelting. Stal' 23 [i.e. 24] no.4:296-299 Ap '64. (MIRA 17:c)

PEVTSOV, V.P., kand.tekhn.nauk; Potebnya, Yu.M., kand.tekhn.nauk; GIMEL'FARB,
A.A., kand.tekhn.nauk

Radiometric investigation of the tuyere zone in blast furnaces. Stal'
23 no.7:599-600 J1 '63. (MIRA 16:9)

1. Dnepropetrovskiy metallurgicheskiy institut.
(Blast furnaces) (Radiometry)

POTESNYA, Yu.M.; LITVINENKO, V.I.; GOTLIB, A.D., rukovoditel';
YUPKO, L.D., rukovoditel'

Investigating the dynamics of a gas flow in the upper part
of the stack during combined blowing. Izv. vys. ucheb. zav.;
chern. met. 6 no.2:23-30 '63. (MIRA 16:3)

1. Zavod "Zaporozhstal" i Dnepropetrovskiy metallurgicheskiy
institut.

(Blast furnaces)

(Gas flow)

COUNTRY : ROMANIA M
 CATEGORY : Cultivated Plants. Fruits. Berries.
 RES. JOUR. : RZhBiol., No. 23 1955 No. 10/834
 AUTHOR : Potec, I., Potec, E., Mereuta, N., Ena, M.
 INST. : -
 TITLE : Behavior of Some Grapevine Varieties Under Unfavorable
 Conditions of Growth in 1955.
 ORIG. PUB. : Anuarul lunar. stint. Inst. agron. Iasi. Bucuresti
 1957, 123-129
 ABSTRACT : Observations on the development of principal grapevine
 varieties in the vineyards in Rornar, Buchum-Vishan and
 Kopou under the unfavorable conditions of 1955 (excessive
 moisture and low temperature in the period of vegetation).
 Varieties which proved to be most resistant to the un-
 favorable conditions of growth in 1955, were: Aligote,
 Muscat Hamburg and Chasselas doré. For grapevine
 varieties non-resistant to unfavorable conditions (Jocasa
 de Rornar, Frynkusha, Babyaska nyagra and Fatyaska al'ba)
 it is recommended to apply a complex agricultural tech-

CARD: 1/2

LUCA, Ion; TIBU, Margareta; POTECH, I.; VISCRIAN, I.

Radioactivity of the Cotnari soil in the Iasi region. Studii
fiz tehn Iasi 13 no.2:291-293 '62.

LUCA, Ioan; POTEC, Ioan; COTEA, Valeriu; FILIP, Dumitru; ANGHEL, Gheorghe

Radioactivity of the wines of the Cotnari vineyards. Studii fiz
tehn Iasi 12 no.2:347-352 '61.

101 EC, 1011
Rumania/Chemical Technology - Chemical Products and Their Application. Fermentation Industry, I-27

Abst Journal: Referat Zhur - Khimiya, No 19, 1956, 63577

Author: Potec, Ioan; Gologan, Emil; Ciobanu, Anatolie

Institution: None

Title: Quality of Wines of Buchum-Yassy Sovkhoz of 1953 Vintage

Original

Periodical: Calitatea vinurilor din podgoria Bacium-Iasi recolta anului 1953. Gradina, via si livada, 1955, 4, No 7, 47-53; Rumanian

Abstract: Investigated were 12 samples of wine from grapes of the 1953 crop. The grapes were gathered late in November when a portion of them were frozen, and the wines were analyzed (after storage in cellars) between 15 January and 15 March 1955. Results of analyses (listing range): Sp. Gr. 0.9900-0.9964; dry residue 15.41-29.82 g/l; unfermented sugar 1.13-15.84 g/l; determined alcohol 12.9-14.4%; total alcohol 13.0-15.1%; total acidity 2.83-4.08 g/l H₂SO₄; volatile acidity 0.18-0.85 g/l H₂SO₄; pH 4.10-5.10. Best indexes were those of fetyaska albe and rose French muscatel.

Card 1/1

POTEC, L.

Biotypes of the Grasa de Cotnari variety of grapes. p. 313.

LUSORARI STIINTIFICE. (Institutul Agronomic "Profesor Ion Ionescu de la Brad,"
Iasi) Bucuresti, Rumania.

Monthly list of East European Accessions (EEAI) LC, Vol. 8, no. 8, Aug. 1959

Uncl.

POTEC, L; LUCA, L; SEPTILICI, G.

Some data on the variation of the oxidation-reduction potential of wine preserved on the sediment of different kinds of yeast. p. 323

LUSCRARI STIINTIFICE. (Institutul Agronomic "Profesor Ion Ionescu de la Br-d," Iasi) Bucuresti, Rumania.

Monthly list of East European Accessions (EEAI) LC, Vol. 2, no.8, Aug. 1959

Uncl.

Historical Index of names of the Army and Navy
1914-1918

Abstract: Further to English summary. Scientific hematological tests were carried out in 100 persons exposed to cadmium and in 100 control individuals. The daily exposure of those in the 2-ray department was 0.02-0.04 g. Of these exposed to injury, 17% had leucopenia, 11% thrombocytopenia and 10% neutropenia. Only 11% of those with more than 100 years of age, 15% of 40-50 years. A few cases of headache, fatigue, muscular dystrophy, age, skin alterations and loss of hair were noted. In 100 or of even moderate radiation is observed. Of 100 persons, 4 are deceased, the rest Eastern European.

SHAKHTMEYSTER, I.Ya, kand.med.nauk, POTEKAYEV, N.S., aspirant

Vitamin B6 in the treatment of certain dermatoses [with summary
in English]. Vest.derm. i ven. 32 no.4:27-29 J1-Ag '58 (MIRA 11:10)

1. Iz kafedry kozhnykh i venericheskikh bolezney (zav. - chlen
korrespondent AMN SSSR prof. V.A. Rakhmanov) I Moskovskogo ordena
Lenina meditsinskogo instituta imeni I.M. Sechenova.

(PSORIASIS, ther.

vitamin B6 (Rus))

(NEURODERMATITIS, ther.

same (Rus))

(DERMATITIS SEBORRHEICA, ther.

same (Rus))

(VITAMIN B6, ther. use

dermatitis seborrheica, neurodermatitis & psoriasis

(Rus))

KUZ'MIN, M.K.; POTEKAYEV, N.S. (Moskva)

On N.S. Toporov. Sov. zdrav. 19 no. 8:73-75 '60. (MIRA 13:10)

1. Iz kafedry istorii meditsiny (zav. B.D. Petrov) I Moskovskogo
ordena Lenina meditsinskogo instituta imeni I.M. Sechenova.
(TOPOROV, N.S., 1803-)

SURA, V.V.; SEMENDYAYEVA, M.Ye.; POTEKAYEVA, M.A.

Role of shock and collapse in the development of a hepatorenal syndrome. Sov.med. 25 no.2:36-40 F '61. (MIRA 14:3)

1. Iz'obshchey i gospital'noy terapevticheskoy kliniki (zav. - deystvitel'nyy chlen AMN SSSR prof. Ye.M.Tareyev) sanitarno-gigiyenicheskogo fakul'teta I Moskovskogo ordena Lenina meditsinskogo instituta imeni N.M.Sechenova, laboratorii deystvitel'nogo chlena AMN SSSR prof. Ye.M.Tareyeva i 24-y Moskovskoy gorodskoy klinicheskoy bol'nitsy (glavnyy vrach V.P.Uspenskiy).
(SHOCK) (LIVER—DISEASES) (KIDNEYS—DISEASES)

POPEKAYEVA, M. A.

POPEKAYEVA, M. A. -- "Changes in the Tissues, Vessels, Nerves, and Lymphatic Joints of the Mediastinum during the Inflammation of the Lungs." First Moscow Order of Lenin Med Institute imeni I. M. Sechenov, Moscow, 1956. (Dissertation for the Degree of Candidate of Medical Sciences;

SO: Knizhnaya Letonis' No 43, October 1956, Moscow

VINOGRADOVA, O.M. (Moskva); ~~POTEKAYEVA~~, M.A. (Moskva)

Cases of cardiac tumors. Arkh.pat. 18 no.5:84-86 '56. (MLA 9:12)

1. Iz gosital'noy i propedevticheskoy terapevticheskoy kliniki (zav. deyatvitel'nyy chlen AMN SSSR prof. Ye.M.Tareyev) sanitarno-gigienicheskogo fakul'teta i Moskovskogo ordena Lenina Meditsinskogo instituta imeni I.M.Sechenova.

(HEART, neoplasms,
sarcoma (Rus))

(SARCOMA, case reports,
heart (Rus))

VINOGRADOVA, O. M.; POTEKAYEVA, M. A.

Miliary tuberculosis with a sharply marked nonspecific "lupoid" reaction. Terap. arkh. 34 no.5:93-96 '62. (MIRA 15:6)

1. Iz kliniki propedevticheskoy i gosital'noy terapii (dir. - deystvitel'nyy chlen AMN SSSR prof. Ye. M. Taroyev) sanitarno-gigiyenicheskogo fakul'teta I Moskovskogo ordena Lenina meditsinskogo instituta imeni I. M. Sechenova.

(LUPUS ERYTHEMATOSUS) (TUBERCULOSIS)

YATSYSHINA, T.A.; POTEKAYEVA, M.A.

Clinical and morphological studies of a subclinical and latent course of Botkin's disease based on data of a puncture biopsy of the liver. Vop.med.virus. no.9:292-297 '64.

(MIRA 18:4)

1. Iz laboratorii rukovodimoy deystvitel'nyy chlenom AMN SSSR prof. Ye.M.Tareyevym.

NASONOVA, V.A.; POTEKAYEVA, M.A.

Hemorrhagic vasculitis in mercusal intolerance. Sov. med. 25 no.11:
29-35 N '61. (MIRA 15:5)

1. Iz kafedry propedevticheskoy i gosptital'noy terapii (zav. -
deystvitel'nyy chlen AMN SSSR prof. Ye.M.Tareyev) sanitarno-
gigiyenicheskogo fakul'teta I Moskovskogo ordena Lenina meditsinskogo
instituta imeni I.M.Sechenova i 24-y gorodskoy bol'nitsy (glavnyy
vrach V.P.Uspenskiy).

(MERSALYL--TOXICOLOGY) (PURPURA (PATHOLOGY))

VELIKORETSKIY, A.N., prof.; MIKIRTUMOV, S.M., kand.med.nauk; KOCHIASHVILI, V.I., kand.med.nauk; KASAIKINA, T.N., kand.med.nauk; GALIYEV, M.A.; KAMALOV, M.Kh.; POPEKAYEVA, M.A., kand.med.nauk; SPASSKAYA, P.A.; VOLKOV, V.A., red.; GRECHISHCHEV, V.A., tekhn.red.

[Surgery for pancreatic cancer] Operativnoe lechenie raka podzheludochnoi zhelezy. Moskva, Izd-vo I-go Mosk.med.in-ta, 1959.
173 p. (MIRA 13:10)

1. Klinika obshchey i gospi'tal'noy khirurgii sanitarno-gigiyenicheskogo fakul'teta I-go Moskovskogo ordena Lenina meditsinskogo instituta im. I.M.Sechenova (for Kochiashvili, Mikirtumov, Velikoretskiy).

(PANCREAS--CANCER)

POTEKAYEVA, M.A.; SMIRNOVA, K.F. (Moskva)

Histological diagnosis of unrecognized gall bladder cancer. *Klin. med.* 40 no.10:118-120 0 '62. (MIRA 15:12)


1. Iz kafedry obshchey khirurgii (zav. prof. A.N.Shabanov)
sanitarno-gigiyenicheskogo fakul'teta I Moskovskogo ordena
Lenina meditsinskogo instituta imeni I.M.Sechenova i patologo-
anatomicheskogo otdeleniya 24-y gorodskoy bol'nitsy (glavnyy
vrach V.P.Uspenskiy).

(GALL BLADDER--CANCER) (DIAGNOSIS, CYTOLOGIC)

SOLOMINA, Ye.N.; POTEKAYEVA, M.A.

Myocardial disease and cardiac insufficiency in chronic septic endocarditis. Vrach.delo no.5:545-546 My '59. (MIRA 12:12)

1. Obshchaya i gospi'tal'naya terapevticheskaya klinika (zav. - deystvitel'nyy chlen AMN SSSR, prof. Ye.M. Tareyev) sanitarno-gigiyenicheskogo fakul'teta Pervogo Moskovskogo meditsinskogo instituta i patologoanatomicheskoye otdeleniye bol'nitsy (zav. - prof. Ya.F. Belyayeva) 24-y gorodskoy klinicheskoy bol'nitsy.
(ENDOCARDITIS)

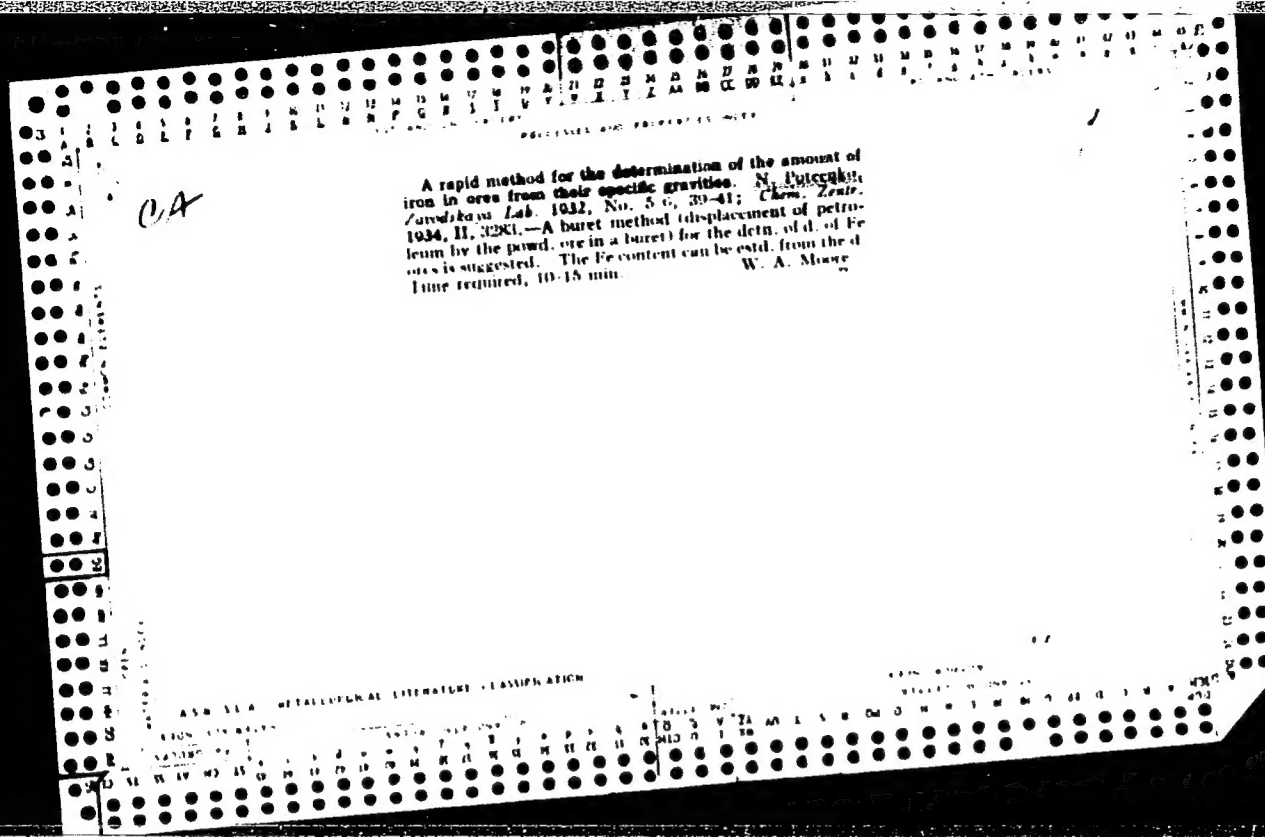

RAKHMANOV, V.A., prof.; POTEKAYEV, M.S., aspirant

The department of dermatological and venerological diseases of the First Moscow Medical Institute; on the 90th anniversary of its organization. Vest.derm.i ven. 33 no.4:68-72 J1-Ag '59.

(MIRA 12:11)

1. Iz kafedry kozhnykh i venericheskikh bolezney (zav. - chlen-korrespondent AMN SSSR prof. V.A. Rakhmanov) I Moskovskogo ordena Lenina meditsinskogo instituta imeni I.M. Sechenova.

(DERMATOLOGY, education)

RAKHMANOV, V. A., prof.; POTEKAYEV, N. S., kand. med. nauk

Moscow Scientific Society of Dermatologists and Venereologists;
on the 70th anniversary of its founding. Vest. derm. i ven. no.4:
68-73 '62. (MIRA 15:4)

1. Chlen-korrespondent AMN SSSR (for Rakhmanov).

(MOSCOW--DERMATOVENEREOLOGICAL SOCIETIES)